

TIGA BELAS — AUSTRAL YACHTS



Судостроитель: [Austral Yachts](#)

Год постройки: 2001

Модель: Палубный парусник

Цена: **ЦЕНА ЯХТЫ ПО ЗАПРОСУ**

Местонахождение: France

Длина общая: 80' 8" (24.59m)

Ширина: 20' 0" (6.10m)

Мин. осадка: 10' 7" (3.23m)

Макс. осадка: 10' 7" (3.23m)

Крейс. скорость: 8 Kts. (9 MPH)

Купить TIGA BELAS — Austral Yachts а также выбрать подходящую вам яхту из нашего каталога яхт вам поможет опытный яхтенный брокер Андрей Шестаков. На сегодняшний день компания Shestakov Yacht Sales Inc. имеет большое количество яхт в собственном списке продаж, а также тесно сотрудничает со всеми крупными яхтенными производителями по всему миру.

Для того чтобы купить яхту TIGA BELAS — Austral Yachts а также проконсультироваться по любому вопросу связанному с покупкой, продажей, чартером яхт позвоните по телефону **+7(918)465-66-44**.

ОГЛАВЛЕНИЕ

ОГЛАВЛЕНИЕ	2
ХАРАКТЕРИСТИКИ	4
Обзор	4
Основная информация	4
Размеры	5
Скорость, вместимость и масса	5
Размещение	5
Корпус и палуба	5
Информация о двигателе	6
ПОДРОБНОЕ ОПИСАНИЕ	7
Construction	7
Machinery	8
Hydraulic and Passarelle	8
Electrical systems	9
Plumbing Systems	10
Tank Storage	10
Navigation Equipment	11
Domestic Equipment	12
Accommodations	13
Spars & Rigging	14
Works Jan/Feb 2018	15
Исключения	16
Отказ от ответственности	16
ФОТОГРАФИИ	17
82´ Sailing Yacht Tiga Belas Aft deck	17
Bill Dixon 82´ Austral Yacht Profile at anchor	17
Austral Yacht 82´ cockpit	17
82´ Sailing yacht Tiga Belas Sunbathing area	17

82´Sailing Yacht Navigation Area	18
82´Sailing Yacht Upper Saloon	18
82´Sailing Yacht Saloon	18
82´Sailing Yacht Dining Area	19
Master Cabin 82´Sailing Yacht Tiga Belas	20
82´Austral yacht Bill Dixon Design Galley	20
Tiga Belas Double Cabin	20
Tiga Belas Bathroom	21
Tiga Belas Twin Cabin	21
КОНТАКТЫ	23
Контактная информация	23
Телефоны	23
Время работы	23
Адрес	23

ХАРАКТЕРИСТИКИ

Обзор

TIGA BELAS is a very comfortable, easy to handle, safe and well performing sailing sloop.

Designed by Bill Dixon Yacht Design Studio, built by Austral Yachts in 2001, the beautiful 24 metre deck-saloon sailing yacht TIGA BELAS features a classic appearance and beautiful sheer lines.

The idea was to create an uncompromisingly comfortable, easy to handle, safe and well performing sloop of the highest standard in respect to construction, materials and equipment.

Consequently an extremely rigid hull construction was chosen.

The vessel is easy to manoeuvre in marinas virtue of her variable controllable pitch propeller and the 45 hp bow-thruster.

Cruising speed at economical consumption is around 8 knots and 2,600 litres of fuel (in 4 tanks) give an approx. range under engine of about 1,000 nautical miles excluding generator consumption.

Sailing the yacht is pleasure. The mainsail, which is operated by the Leisure Furl patented carbon boom, can be hoisted hydraulically either by 24v battery power (in light conditions) or by a power take off connected to the main engine in a matter of 1.5 minutes only. The fully battened sail with a considerable roach gives an excellent shape even when reefed. Reefing is merely a matter of pushing a button.

The Genoa, (also furled by the push of a button), just like the self-tacking staysail, are efficient and easily managed sails.

Основная информация

Тип судна: Палубный парусник

Подкатегория: Cutter

Модельный год: 2001

Год постройки: 2001

Страна: France

Размеры

Длина общая: 80' 8" (24.59m)

Длина по ватерлинии: 62' 0" (18.90m)

Ширина: 20' 0" (6.10m)

Мин. осадка: 10' 7" (3.23m)

Макс. осадка: 10' 7" (3.23m)

Скорость, вместимость и масса

Крейс. скорость: 8 Kts. (9 MPH)

Дальность на крейсерской скорости:
1000

Водоизмещение: 136025.215654 Pounds **Вместимость воды:** 145.2946286 Gallons

Вместимость сточного бака:
276.05979434 Gallons

Объем топливного бака: 2599.981335784
Gallons

Размещение

Всего кают: 3

Всего коек: 6

Спальные места: 8

Всего ком. состава: 3

Каюты экипажа: 1

Койки экипажа: 2

Спальных мест экипажа: 2

Комм. состав экипажа: 1

Корпус и палуба

Материал корпуса: GRP/Wood

Материал палубы: Teak

Комплектация корпуса: Bulb Keel

Отделка корпуса: Stainless Steel

Информация о двигателе

Производитель: Luger

Модель: 6108A2

Тип двигателя: Inboard

Тип топлива: Diesel

ПОДРОБНОЕ ОПИСАНИЕ

Construction

Hull, Deck & Superstructure Construction:

- TIGA BELAS has an extremely rigid hull construction with a 45 mm red cedar core and multiple inner and outer layer of epoxy GRP was chosen. The outer layer was additionally fitted with 1.5 layers of Kevlar for improved impact resistance. Structural members such as keelson, engine beds and mast step were constructed in solid mahogany and epoxy GRP coated.
- Deck joinery: The foredeck, side and aft decks, pilothouse and cockpit floors and aft bridge deck are covered with teak planking (which was of 15 mm thickness when new).
- Burma teak.

Varnished teak capping rail and cockpit coamings

Keel & Rudder:

- Keel constructed of (12 mm) mild steel with top plate 18 mm, bottom plate 50 mm and bulb plate 15 mm.
- The keel is used as a fuel tank.
- The keel is bolted to the Mahogany keel stub, which is encapsulated with (4 x QE 1200 E-glass).
- There are 17 upper keel bolts with a diameter of 35 mm each.
- The number of lower keel bolts is 15 with diameter of 24 mm each.
- The Keel bolts are fabricated from stainless steel 316 (Recently had Ultrasound on 4 selected keel bolts - report available).

- Hydraulic, twin helm pumps drive two unbalanced rams. System supplied by Gerhard Seegers. The system gives about 4.5 turns lock to lock. Full rudder arc 70 degrees. Rams are cross-connected and valved, so that in case of one ram failure, the yacht can run on the other ram alone for emergency. Safety and bypass valves are fitted.
- Emergency steering by lever onto square on top of rudderstock. Tiller connected to control lines, which are led to both primary winches.
- Rudder blade fully balanced, glassed over foam with E-glass and Kevlar, stainless steel reinforced. Rudderstock solid stainless steel of 110 mm diameter (rudder was extended at some stage by a former owner - documentation available on request; regarding the safety of this change).

Machinery

Engine & Gearbox:

- Luger 6108A2 main engine
- Rated output 300hp continuous duty at 2300 rpm.
- Aquadrive 20600 fitted.
- Hundestad controllable pitch propeller fitted, with 3 electronic Kobelt controls combined with throttle controls.
- The yacht can be manoeuvred on either the gearbox or the pitch controls.

- Cruising speed under power 8 knots at 1450 rpm.
- Engine hours at February 2017 - 7237

Propulsion & Steering:

- A spacious and well-separated steering cockpit provides ample space to work with no ropes or winches interfering.
- 2 steering positions

Bowthruster:

- The thruster is manufactured by Lewmar, Type SVT400, vertical retracting, 45hp
- A PTO mounted at the front of the main engine powers the thruster.
- Joystick controls are mounted on each of the helm consoles with audible and visual alarms
- 2 x Electronic engine controls manufactured by Kobelt are installed at each helm station and the chart table.
- Each helm station also has a Lewmar Joystick control for the bowthruster

Hydraulic and Passarelle

The hydraulic system comprises the following:

- One PTO on the main engine driving a pump
- One Lewmar Commander 9+5 with 3 pumps of 9kw + 5kw + 5kw capacity
- The PTO operates all the functions, which operate hydraulically with engine running.
- The Commander operates in silent ship mode (no engine running) on 24v current supply from the hydraulic battery bank and operates all hydraulic sails and hatch functions, except the bowthruster

The hydraulics operate the following functions:

1. Headsail furler (Reckmann).
2. Staysail furler (Reckmann).

3. Anchor windlass.
4. Primary winches.
5. Primary Winch.
6. Staysail sheeting captive winch.
7. Main Sail Boom Furling Mandrel.
8. Main halyard Captive Winch.
9. Halyard winch.
10. Halyard winch.
11. Mainsheet Winch.
12. Navtec Panel for Vang and Backstays.
13. Main Traveller Ram.
14. Dinghy Hatch.
15. Engine Room Hatch.
- 16.

Note: The Opacmare passerelle is also operated hydraulically but has its own dedicated electronic/hydraulic system.

Electrical systems

Battery Banks:

- 2 x Lucas battery banks - 1200 Ah each, Gel traction cell type, each battery cell 2 V, linked to form 24 V.
- Banks are dedicated to either general services (house) or hydraulics, but in case of failure switchable to serve the other, failing, circuit or starter batteries.
- Main engine starting battery: 2 x 200 Ah, 12 V, in series 24 V (New 2014 180 AH).
- Generators starting batteries: 2 x 200 Ah, 12 V, in series 24 V (New 2014 180 AH).

Battery Chargers:

- 2 Mastervolt Mass combi chargers 24/4000, plus one 175 A alternator mounted on the main engine to charge the service and hydraulic batteries.
- Alternator can charge all the battery banks through a Vetron diode which was fitted in 2016
- Starting batteries are charged through the alternators fitted to main engine and each generator or shore power.

Alternators:

- 1 x Main engine alternator – 175 amp.

Generator:

- Northern Lights ML 984 - 25 KW, continuous rating at 1500 rpm, single phase, 50 Hz.
- Generator hours at February 2017 - 6154

Plumbing Systems

Fresh Water & Water Heating System:

- 2 x Boilers – Large / Small; capacities unknown.

Watermaker:

- Sea Recovery Aqua Whisper Model 1200-2AWC.

Bilge Pumps:

- There are 6 bilge compartments using a manifold with 2 main bilge pumps, one electric and the other hydraulically driven, each with a capacity of 300 litres per minute
- Manual Whale gusher pump with a capacity of 25 litres a minute is installed in the cockpit.
- 5 nuisance water pumps will discharge smaller quantities of water from the respective areas
- Main bilge pumps are used as fire fighting pumps through special piping system

Tank Storage

- All tanks are manufactured from 3mm stainless steel and are mounted on soft supports and strapped down. All tanks have been pressure tested to 0.3 bar, in excess of what is required under classification rules.
- Fuel pipe work is manufactured of stainless rigid piping up to 1” and above that of nitrile lined rubber to classification standard. In the engine room all fuel lines are made of stainless steel.
- Pipe work for water is made of Class approved PVC.
- All tanks are provided with Kuebler level indicator gauges, connected to synoptic panels and alarms.
- All tanks have large inspection hatches
- All tanks are vented into the mast.

Fuel:

- Total capacity of 2,600 litres (571 gallons) in 4 x stainless steel tanks.

Fresh water:

- Total capacity of 550 litres (120 gallons) in 2 x stainless steel tanks.

Grey/Black water holding tanks:

- Total grey water capacity of 610 litres (134 gallons) – stainless steel.
- Total black water capacity of 435 litres (95 gallons) – stainless steel.

Navigation Equipment

B+G sailing instruments as follows:

- Hydra 2000 FFD (1 at chart table, 1 at helm stations, 1 in owners' cabin).
- Hydra 2000, 360 degree Wind, analogue, (1 at chart table, 2 at helm stations).
- B+G 20/20, boom angle, heading, depth, speed, (4 at cockpit front).
- Depth transducers.

Furuno Navigation instruments:

- 2 x Simrad plotters and radar (2015).
- GPS GP-31, (one at Chart Table as backup).
- *Robertson Autopilot:*
 - Robertson AP 20 (one at Chart Table, one at helm station).
- *Communications Equipment:*
 - Sailor 150 2015 with satellite telephone without data lines or fax
 - Simrad VHF 2015 with cordless handset on the starboard helm station).
 - PABX for internal onboard communication through Intercom system.
 - One foghorn.
 - One of the helm stations has a crew alarm.

Compasses:

- 2 Ritchie magnetic, (one on each helm station).
- 2 Fluxgate, one Furuno, one Simrad, both interfaced with all Nav. Instr.

Synoptic Panels:

These are located in the Navigation area and are divided into three sections:

First division, status lamps:

1. Navigation lights.
2. Water pressure pump running.
3. Refrigeration compressors.
4. Electric bilge pump running.

Second division, Alarm warning lamps combined with flashing and audible alarm:

1. Engine room fire.
2. Lazarette fire.
3. High bilge water level in any compartment.

4. Low battery voltage.
5. Low level keel tank.
6. Black water tank full.
7. Grey water tank full.
8. Low level fresh water tanks.
9. Low level fuel tanks.

System status with analogue/digital read out meters showing:

1. Voltage for services/hydraulics battery banks (through master view display new 2014)
2. Charge/discharge current for services/hydraulics battery banks (as above).
3. Earth leak conditions (synoptic display).
4. Voltage (Master view).
5. Amp hours (Master view).
6. Shore power polarity (synoptic display).
7. Remote control panel for the Generators start/stop
8. Remote control panel for the air-condition system

There is a switch to change from generator/shore power/inverter and to load shed (2 switches for each Buss system on board).

Domestic Equipment

Galley:

- Ceramic 4 burner stove top, Miele **2014**
- Oven with grill, hot air, top and bottom heat, Miele, **2014**, with Miele Extractor fan.
- Miele Dishwasher.

Galley continued:

- Miele Washing Machine **2016**
- Miele Condenser Dryer **2016**
- 2 Refrigerators, custom made in stainless steel, front loaded, appropriately divided and 1 Refrigerator, custom made in stainless steel, incorporated in the cockpit table and 1 Freezer, custom made in stainless steel, front loaded, divided with slide out drawers.
- Icemaker, 220 V AC, self-contained.
- All refrigerators and the Freezer (except the Icemaker) are operated by 6 Frigomatic K DC compressors.

Heads/Showers:

- A deck shower is installed on the aft deck.
- 4 x Superflush Prestige toilets 2002. Flushing is by fresh water into stainless steel black water holding tanks, which can only be discharged by manual activation for environmental reasons. Crew toilet is of same technical characteristics but for size reasons made by Sunny Marine.
- Holding tanks are fitted with level switches, which send audio and visual signals to the main alarm panel.

Tank discharges overboard below waterline or to a Lee Sanitation Deck fitting to ISO 4567 standard.

Heating & Ventilation:

- The yacht is throughout equipped with 7 controllable air handlers
- The size varies depending on the size of the cabin
- Total capacity is 45,000 B.T.U. per hour, for both cooling and heating. 51 running amps are required at 230v

Entertainment:

- CD in each cabin.
- DVD – CD player in saloon.
- Speakers in cockpit.

Lighting:

- Just behind the Rudder about 1 foot under waterline there are 2 underwater lights (port and starboard) have been installed.
- The lights are switchable from the port helm station.

Accommodations

Summary of Accommodation:

- The classically-styled interior is tasteful and is executed in American Cherry wood.
- The upper salon is a comfortable area, perfect for enjoying the surrounding environment while under sail (new pale leather upholstery fitted **2016**).
- The lower or dining saloon offers a comfortable space to read, entertain friends or dine in style.
- The hull ports are manufactured by Van Wingerden in stainless steel and fitted with storm blinds (*note: storm blinds are onboard but not for every port hole*).

TIGA BELAS comfortably accommodates up to 8 guests in 3 staterooms.

All the guest staterooms include first class amenities, individually controlled audio systems and

air-conditioning and en-suite facilities.

The luxurious master stateroom with king sized berth and 2 en-suite heads compartments. The 2 guest cabins have double berths and en-suite bathrooms. Each guest cabin has also a Pullman berth.

Crew:

The crew area is separated from the guest cabins and is located forward of the saloon.

Workshop:

The Workshop is located in the most forward compartment of the yacht and is fully fitted with tools, nuts and bolts, spare electrical and plumbing items, as is required on a yacht this size. All tools are in dedicated positions, as are the spares, for the ease of finding the required tool/spare.

Spars & Rigging

Rig:

- Spars manufactured by: Marten Spars Ltd., Auckland, New Zealand.
- Mast and Boom are made of carbon fibre.
- Boom is manufactured under Leisure-Furl license for mainsail stowage and reefing.
- Mast has 4 swept back spreaders (carbon fibre).

- Boom has integral custom-made sunshade systems.
- Mast and Boom have integrated mast and cockpit illumination systems.
- Standing rigging by Riggarna, stainless steel 316 Rods (8 year service done in **2015** when the rigging was sent to Denmark for complete overhaul).
- Running rigging: Vectran halyards and Spectra sheets.
- The entire Rig is painted with Awlgrip paint in Oyster White (last painted **2015**).
- Boom vang and Backstay cylinders: Navtec.
- Genoa and Staysail Furler: Reckmann RF90-3 R50, resp. R40 in stainless steel (both Reckmann furlers returned to Reckmann in **2015** for complete overhaul).
- Deck hatches are Lewmar Ocean Range in polished aluminium.

SAILS:

- Genoa and staysail were new **2015**.
- Main and headsail are hydraulically furled.
- APC (MPS) is stowed in a sleeve.

Sizes of sails:

1. Mainsail = 143.9 m²; Doyle Bouzaid Sails Ltd. From New Zealand – Vectran – believed to be original from 2001.

2. Genoa = 139 m² (NEW 2015 material Dacron).
 3. Staysail = 57 m² (NEW 2015 material Dacron).
- APC (MPS) in Nylon in rainbow colours: 406 m²; stowed in a sleeve, for easy hoisting.
 - Parasail.

Rig Measurements:

1. I = 29,024 m.
2. J = 8,816 m.
3. P = 26,188m.
4. E = 9,616m.

Works Jan/Feb 2018

PTO removed and serviced.

Bow thruster removed and serviced.

Hydraulic system flushed, and oil changed.

Batteries tested (and after testing the service bank was replaced) upgraded monitoring system.

Bilges cleaned.

Hull/keel sanded down, then a protection system applied consisting of:

Interprime 820 white; Interprime 820 grey; Interprime 820 white;

Micron 350 anti-fouling 2 coats (these last two coats to be applied later this month); Propspeed applied to shaft and prop.

Back stay and vang hydraulics serviced.

Gear box removed and rebuilt by ZF Spain.

Hull polished.

Fuel sensor system to be upgraded.

Исключения

При продаже яхты исключаются личные вещи владельца.

Отказ от ответственности

Компания предоставляет описание судна или яхты добросовестно, но не может гарантировать точность этой информации, а также не ручается за техническое состояние. Покупатель должен проинструктировать своих агентов или оценщиков исследовать представленную информацию более подробно, по собственному желанию. Продажа судна или яхты, изменение цены или снятие с продажи будет происходить без предварительного уведомления.

ФОТОГРАФИИ



82' Sailing Yacht Tiga Belas Aft deck



Bill Dixon 82' Austral Yacht Profile at anchor



Austral Yacht 82' cockpit

82' Sailing yacht Tiga Belas Sunbathing area



82' Sailing Yacht Navigation Area



82' Sailing Yacht Upper Saloon




82' Sailing Yacht Saloon





82' Sailing Yacht Dining Area

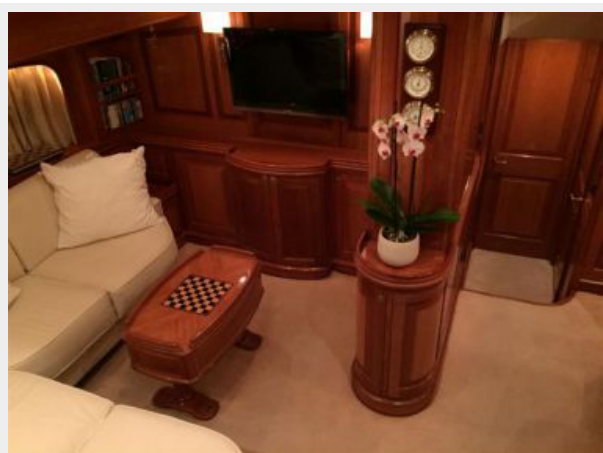

Master Cabin 82' Sailing Yacht Tiga Belas



82' Austral yacht Bill Dixon Design Galley




Tiga Belas Double Cabin




Tiga Belas Twin Cabin



Tiga Belas Bathroom

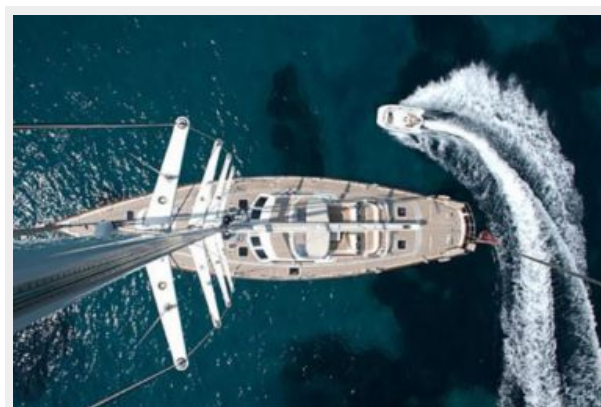

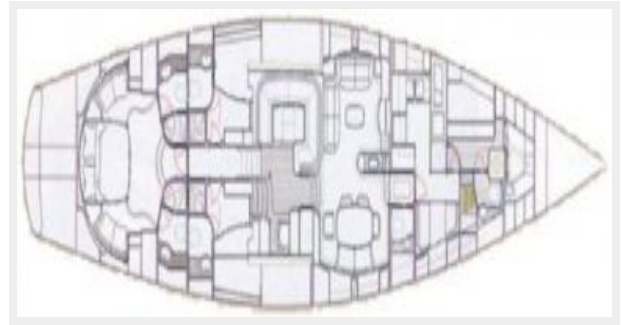

КОНТАКТЫ

Андрей Шестаков (Andrey Shestakov) – ведущий яхтенный брокер отдела продаж яхт и судов компании Shestakov Yacht Sales Inc. Официальный представитель Shestakov Yacht Sales Inc. для русскоговорящих клиентов в центральном офисе компании в Майами/Форт Лодердейл/Флорида/США.

Контактная информация

Email: andrey@shestakovyachtsales.com

Web: shestakovyachtsales.com

Телефоны

Краснодарский край: **+7(918)465-66-44**

США, Майами, Флорида: **+1(954)274-4435**

Время работы

Понедельник – Суббота: **9:00 - 21:00**
EDT

Воскресенье: **Закрето**

Адрес



Harbour Towne Marina, 850 NE 3rd St,
STE 213, Dania, FL 33004